

# Electrolux

## Modular Cooking Range Line

### S90 Full Surface Four Zone Induction Range on Pass-Through Open Base, Island, 2 Side

ITEM # \_\_\_\_\_  
 MODEL # \_\_\_\_\_  
 PROJECT NAME # \_\_\_\_\_  
 SIS # \_\_\_\_\_  
 AIA # \_\_\_\_\_

**Electrolux**

**Modular Cooking Range Line**  
**S90 Full Surface Four Zone Induction Range on**  
**Pass-Through Open Base, Island, 2 Side**



#### Modular Cooking Range Line

### S90 Full Surface Four Zone Induction Range on Pass-Through Open Base, Island, 2 Side

- 584136 (WIWABQQOB)** Full Surface Four Zone Induction Range, pass-through open base, island, 2 side operation – 208 V
- 584137 (WIXWABQQOO)** Full Surface Four Zone Induction Range, pass-through open base, island, 2 side operation – 240 V

#### Short Form Specification

Item No. \_\_\_\_\_

Unit to be Electrolux S90 Full Surface Four Zone Induction Range on pass through open base. Electric characteristics to be \_\_\_ 208 V or \_\_\_ 240 V three phase. Unit to be installed in central island type installation with operations from both sides. Unit to have glass ceramic cooking surface with 2 independently controlled 5 kW induction zones. Unit to feature large surface induction top with seamless transition between individual heating zones. Body and open base of unit entirely in 304 stainless steel. Unit shall have heavy duty 304 stainless steel internal frame with reinforcement on the top of 0.157" (4 mm). Extra strength work top in heavy duty 0.118" (3 mm) stainless steel. "Lasertec" connection system permits units to be connected to each other creating a seamless work top.

Covered by Electrolux Platinum Star® Service Program two-year parts and one-year labor warranty, installation start-up and performance check-up after one year from installation.

#### Main features

- Unit for island type installation with operations by chef from both sides (nobs on both sides of the console).
- Glass ceramic cooking surface with 2 independently controlled induction zones with a power of 5 kW per zone.
- The large surface induction top offers a substantial increase in pan or pot capacity with a seamless transition between individual heating zones, ideal for à la carte operation.
- Each cooking zone is composed of two induction coils.
- Almost the entire surface of the ceramic plate can be used without "dead" spots.
- On indicating lamp for each zone located on control console.
- Fast deployment with full heating power immediately.
- Low heat dissipation to the kitchen.
- Power to the individual zones can be set with progressive output i.e. fine regulation at the lower and larger progress at the upper levels.
- The smooth, glass ceramic plate is not directly heated, so there is no burning on cooking surface.
- Heavy duty internal frame 304 type stainless steel with reinforcement on top of 0.157" (4 mm).
- 0.118" (3 mm) top in 305 type stainless steel.
- "Lasertec connection system" creates seamless work top when units are connected to each other.
- Unit delivered with four 7-7/8" (200 mm) legs as standard (all round stainless steel kick plates as option).

#### Optional Accessories

- Set 4 castors (2 with brake).
- Stainless steel 0.118" (3 mm) side panel.
- 5" (130 mm) portioning shelf.
- 7.8" (200 mm) portioning shelf.
- All round stainless steel kick plates.
- Scraper for induction ranges.




Approval: \_\_\_\_\_

**Electrolux Professional, Inc.**  
[www.electroluxusa.com/professional](http://www.electroluxusa.com/professional)

3225 SW 42nd Street, Fort Lauderdale, Florida, 33312 • Telephone Number: 866-449-4200 • Fax Number: 954-327-6789



**Modular Cooking Range Line**  
**S90 Full Surface Four Zone Induction Range on**  
**Pass-Through Open Base, Island, 2 Side**

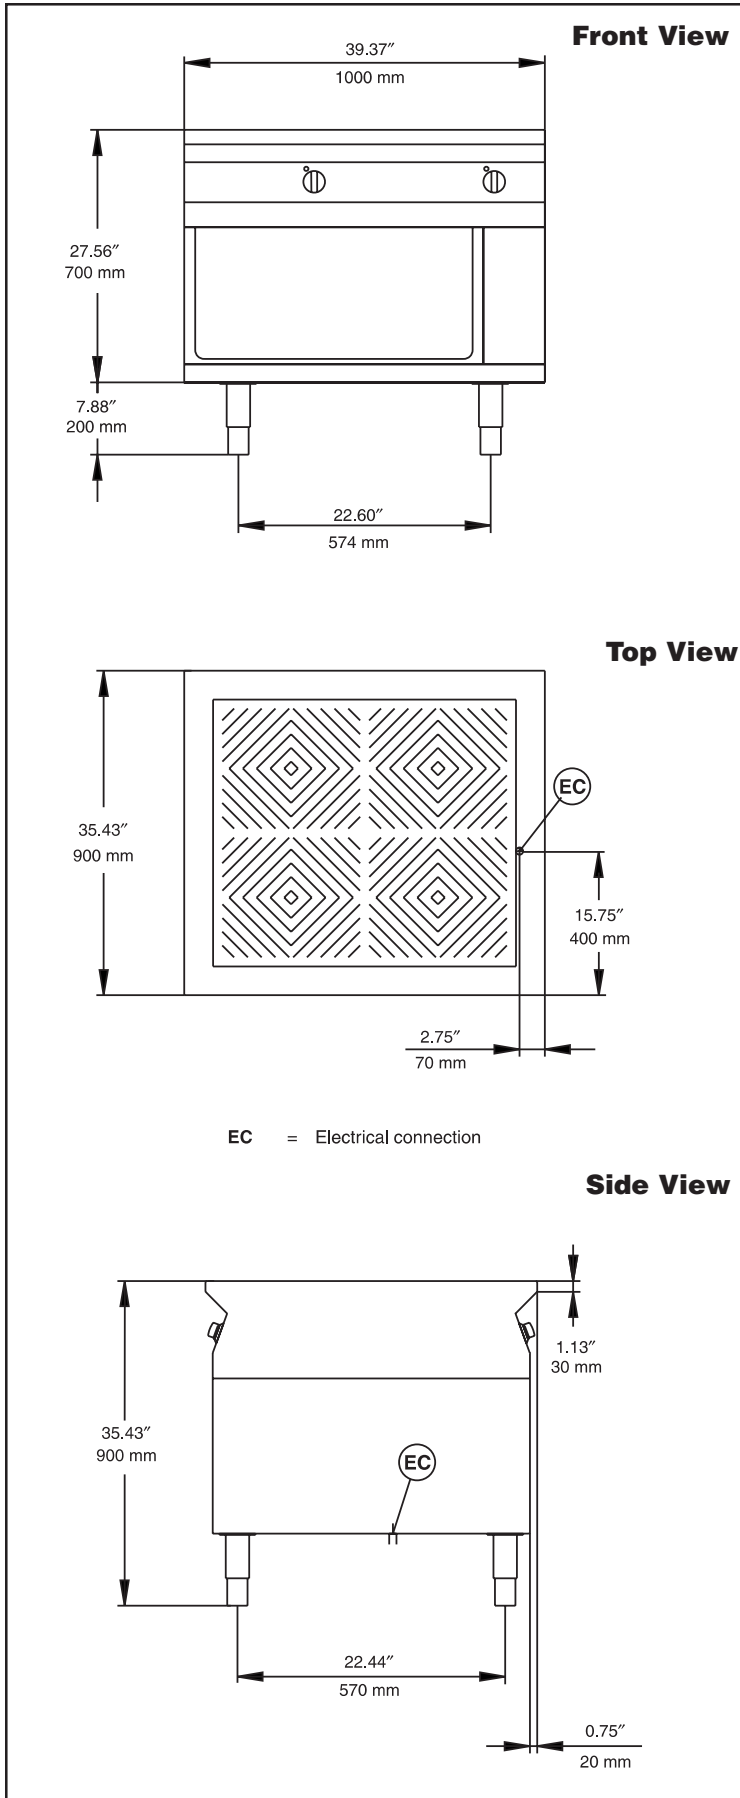

**Electric**

**Supply voltage:**

<b>584136 (WIWWABQQOB)</b>	208 V/3p/60Hz - 55.5A
<b>584137 (WIXWABQQ00)</b>	240 V/3p/60Hz - 48.1A
<b>Total Watts:</b>	20 kW

**Key Information**

<b>Induction Top Dimensions (width):</b>	33.07" (840 mm)
<b>Induction Top Dimensions (depth):</b>	29.13" (740 mm)
<b>Storage Cavity Dimensions (width):</b>	13-3/8" (340 mm)
<b>Storage Cavity Dimensions (height):</b>	14-1/16" (358 mm)
<b>Storage Cavity Dimensions (depth):</b>	29-1/16" (738 mm)
<b>Net weight:</b>	353 lb (160 kg)
<b>Shipping weight:</b>	397 lb (180 kg)
<b>Shipping width:</b>	47-1/4" (1100 mm)
<b>Shipping height:</b>	43-5/16" (1100 mm)
<b>Shipping depth:</b>	43-5/16" (1100 mm)
<b>Shipping volume:</b>	51.2 cu.ft (1.45 m <sup>3</sup> )

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap off approximately 6" (150 mm) should be maintained or some form of heat insulation fitted.

Induction compatible pots & pans must be used.

**Modular Cooking Range Line**  
**S90 Full Surface Four Zone Induction Range on**  
**Pass-Through Open Base, Island, 2 Side**

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.